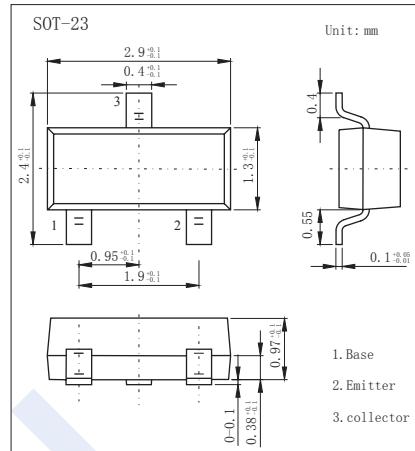


**PNP Transistors****2SA1179****■ Features**

- High breakdown voltage

**■ Absolute Maximum Ratings Ta = 25°C**

Parameter	Symbol	Rating	Unit
Collector-base voltage	V <sub>CBO</sub>	-55	V
Collector-emitter voltage	V <sub>C EO</sub>	-50	V
Emitter-base voltage	V <sub>EBO</sub>	-5	V
Collector current	I <sub>C</sub>	-150	mA
Collector dissipation	P <sub>C</sub>	200	mW
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-50 to 150	°C

**■ Electrical Characteristics Ta = 25°C**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V <sub>CBO</sub>	I <sub>C</sub> = -100μA , I <sub>E</sub> = 0 A	-55			V
Collector-emitter breakdown voltage	V <sub>C EO</sub>	I <sub>C</sub> = -1mA , I <sub>B</sub> = 0 A	-50			V
Emitter-base breakdown voltage	V <sub>EBO</sub>	I <sub>E</sub> = -100μA , I <sub>C</sub> = 0 A	-5			V
Collector cutoff current	I <sub>CBO</sub>	V <sub>CB</sub> = -35V , I <sub>E</sub> = 0 A			-0.1	μ A
Emitter cutoff current	I <sub>EBO</sub>	V <sub>EB</sub> = -4V , I <sub>C</sub> = 0			-0.1	μ A
DC current Gain	h <sub>FE</sub>	V <sub>CE</sub> = -6V , I <sub>C</sub> = -1mA	200	400		
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -50mA , I <sub>B</sub> = -5mA			-0.5	V
Base-emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> = -50mA , I <sub>B</sub> = -5mA			-1.0	V
Output capacitance	C <sub>ob</sub>	V <sub>CB</sub> = -6V , I <sub>E</sub> =0 , f = 1MHz		4.0		pF
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = -6V , I <sub>C</sub> = -10mA		180		MHz

**■ Marking**

Marking	M
---------	---